
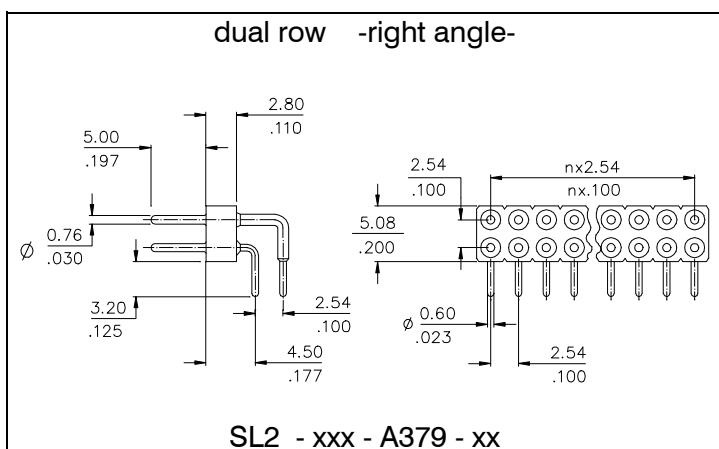
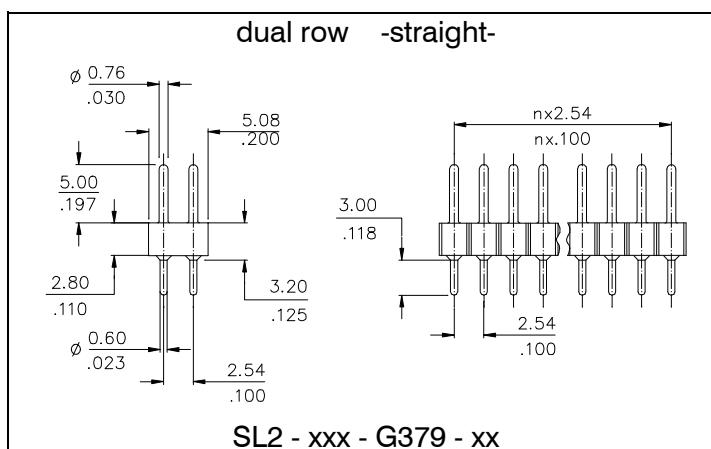
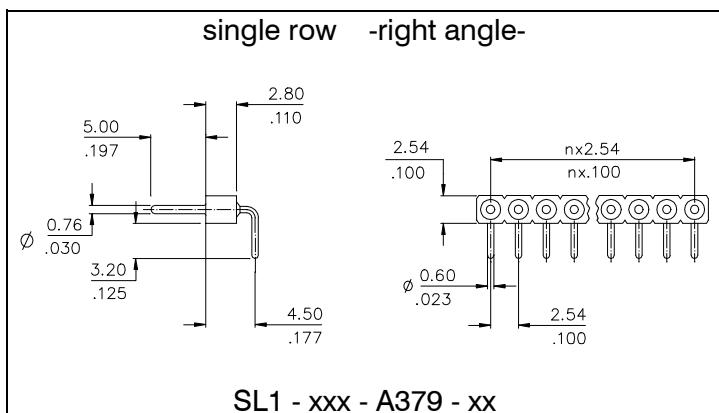
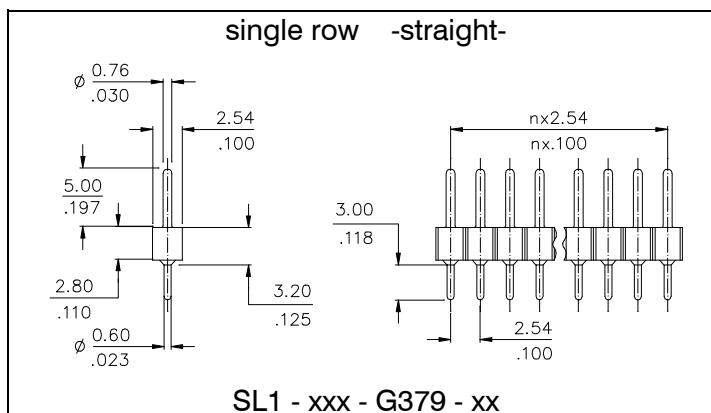


2,54mm pitch male header with precision turned „Jumbo“ pin,  $\varnothing$  0,76mm / .030“, for board to board connections.

Mates with the „Jumbo Contact“ female headers shown in this catalogue.

The pin headers are stackable and available in single and double row version.

The pins are either completely gold or tin plated.

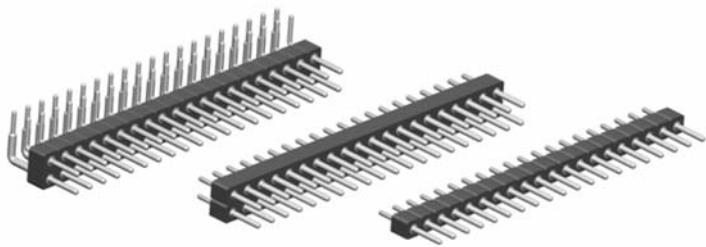

## Specifications

### Material

Insulator *(RoHS compliant)*

high temp plastic UL 94 V-O

$10^4$  M $\Omega$  min.

Terminal *(RoHS compliant)*

CuZn

500 V AC for 1 minute

### Operating temperature

-55° C to +125° C

### Electrical data

Insulation resistance

60 V RMS / 90 V DC

Breakdown voltage

30 m $\Omega$  / contact max.

Rated voltage

3 A max.

Contact resistance

Current rating

How to order

S L x - x x x - X 3 7 9 - x x

### Series

**SL1** = single row.....

### Nbr of contacts

.....002 to 040

064 on request only

### Terminal style

**G** = straight

**A** = right angle

### Plating

- 99 = tin  
(tin leadfree)

- 55 = gold

<b>SL1</b>	= single row.....
<b>SL2</b>	= dual row.....

<b>SL1</b>	= single row.....
<b>SL2</b>	= dual row.....

<b>SL1</b>	= single row.....
<b>SL2</b>	= dual row.....

<b>SL1</b>	= single row.....
<b>SL2</b>	= dual row.....