
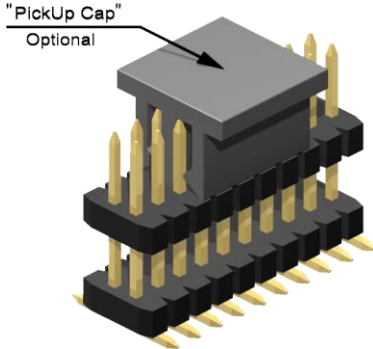



1.00mm pitch Board Spacer
- SMT - dual row

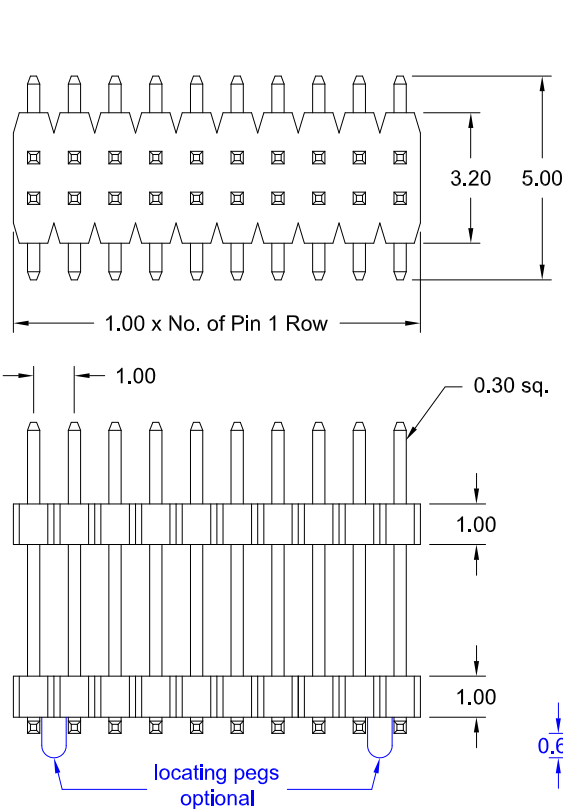

Specifications

Current rating	1 A
Insulation resistance	1000 MΩ min.
Withstanding voltage	500 V AC
Operating temperature	- 40°C to +105°C
Processing temperature	+250°C +0/-5°C for 5sec.
Contact material	(RoHS compliant) Copper alloy
Insulator material	(RoHS compliant) PA9T UL 94 V-0

PCB Surface Mount Layout

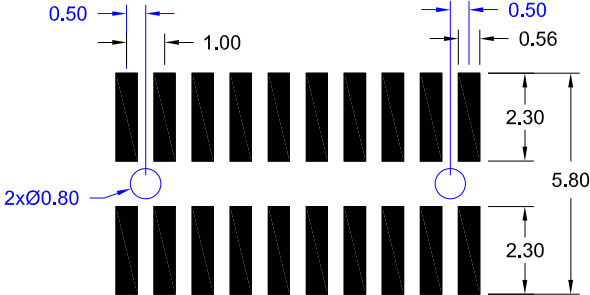

How to order

SP2 - xxx - H 51/x - 55/00 X

Nbr of pins	Pin code	DIM "A"	DIM "B"	Plating	Options	
002 to 100	51/0	2.00 mm	7.80 mm	55 = Gold other platings on request	without "locating pegs"	
	51/1	2.00 mm	5.80 mm		A = Tube packing; with „PickUp Cap“	
	51/2	2.00 mm	9.70 mm		B = Reel packing; with „PickUp Cap“	
	51/3	2.00 mm	3.70 mm		with "locating pegs"	
	51/4	2.00 mm	14.00 mm			C = Tube packing; without „PickUp Cap“
	51/5	2.00 mm	6.30mm			D = Tube packing; with „PickUp Cap“
	51/6	2.00 mm	17.00 mm			E = Reel packing; with „PickUp Cap“
	other dimensions on request					