


1.27mm - SMT - Pin Header
dual row 1.27mm x 2.54mm

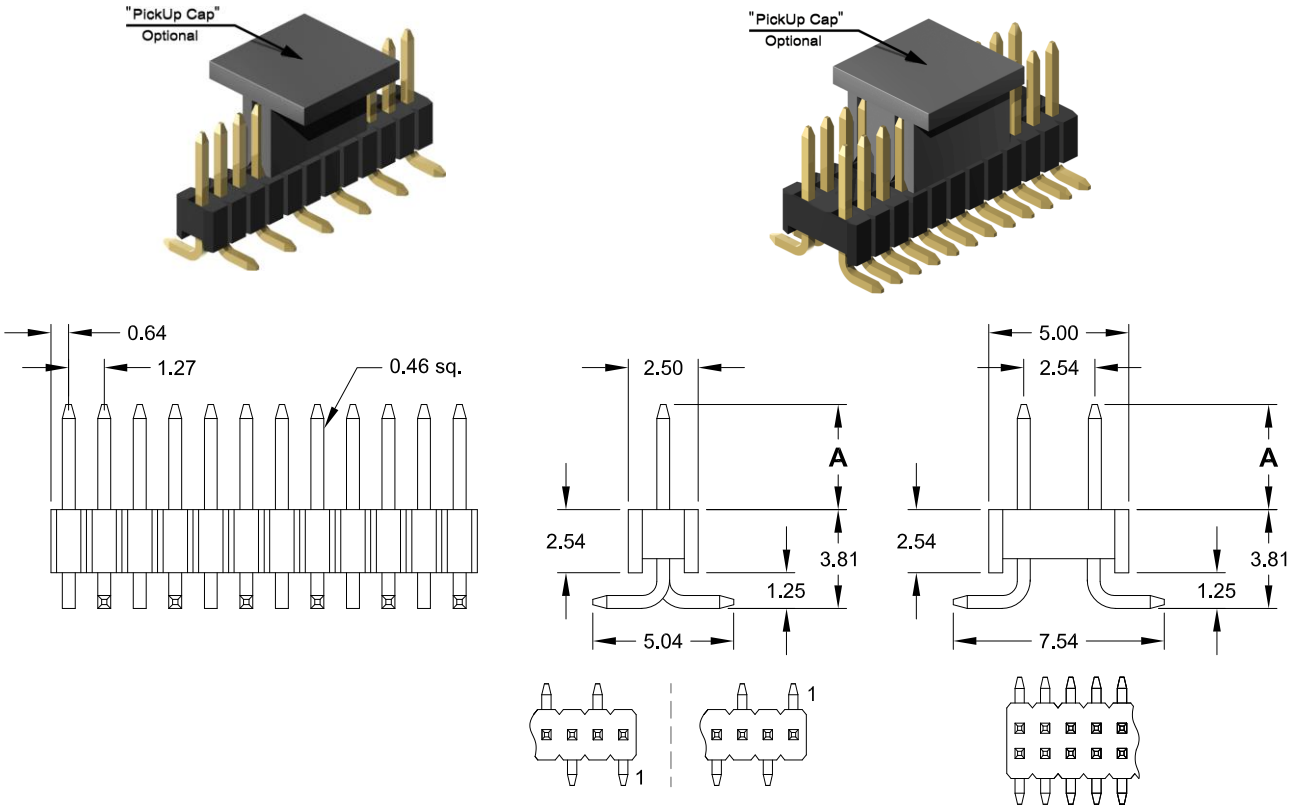

Foot Style: **380** **381** **380**

Specification		PCB Surface Mount Layout		
Current rating	1 A			
Insulation resistance	1000 MΩ min.			
Withstanding voltage	500 V AC			
Operating temperature	- 40°C to +105°C			
Processing temperature	+250°C +0/-5°C for 5sec.			
Contact material	(RoHS compliant) Copper Alloy			
Insulator material	(RoHS compliant) PA6T UL 94 V-0			
		Foot Style: 380 (single row)	381 (single row)	380 (dual row)

How to order

SS x - xxx - H xxx / x - 55/1 X

Rows	Nbr of pins	Foot Style	Pin code	DIM "A"	Plating	Packing and "PickUp Cap" Option
1 = single row	003 to 050	380 / 0 381 / 0		2.80 mm 2.80 mm	55 = Gold	A = Tube packing; with "PickUp Cap" B = Reel packing; with "PickUp Cap"
2 = dual row	006 to 100	380 / 0 380 / 1 380 / 2 380 / 3		2.80 mm 4.50 mm 5.50 mm 4.80 mm	other platings on request	
		other dimensions on request				