

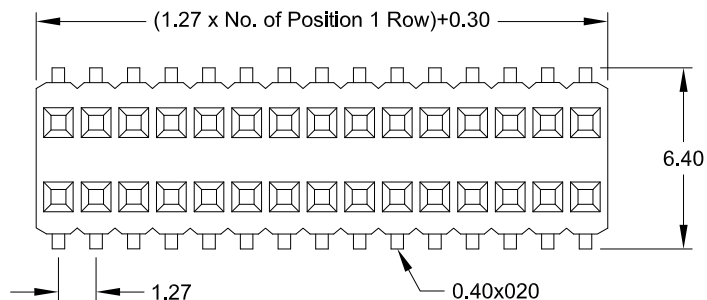
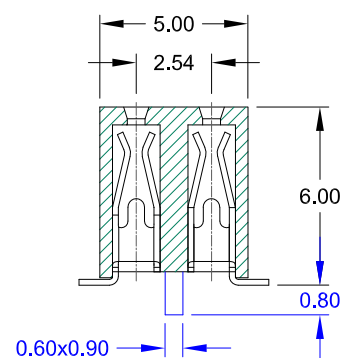


1.27mm x 2.54mm pitch Female Header

- SMT - dual row 6.00mm profile

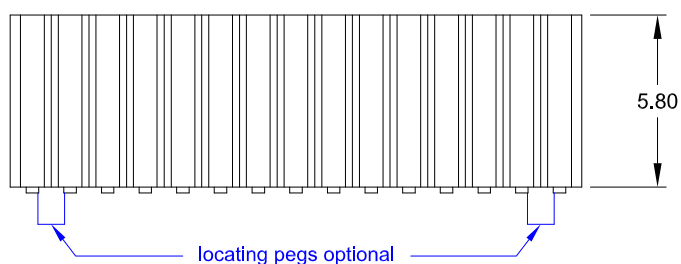


"PickUp Cap"
Optional

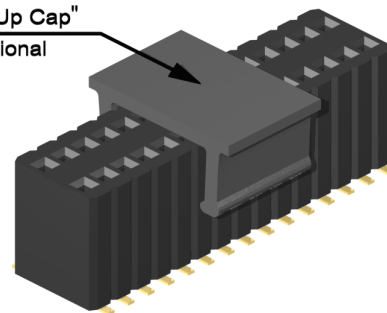

Specifications

Current rating	1 A
Insulation resistance	1000 MΩ min.
Contact resistance	20 mΩ max.
Withstanding voltage	500 V AC
Operating temperature	- 40°C to +105°C
Processing temperature	+250°C +0/-5°C for 5sec.
Contact material	(RoHS compliant) Phosphor Bronze
Insulator material	(RoHS compliant) PA6T UL 94 V-0

PCB Surface Mount & Hole Layout

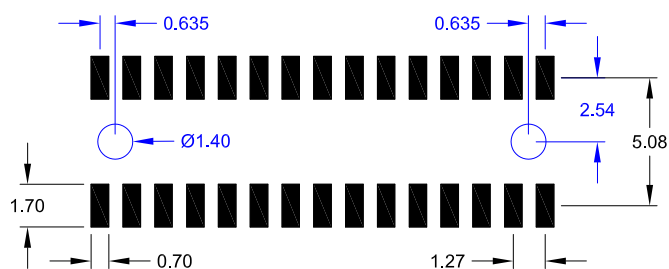

Application and Features

Standard: Tube packing, without "locating pegs" and without "PickUp Cap"

Hi-rel inner contact design, mates with 0.46 mm square Pin Headers

How to order

BS2 - xxx - H600 - 55/1 X

Nbr of contacts
006 to 100

Plating
55 = Gold

Options
without "locating pegs"
A = Tube packing; with „PickUp Cap“
B = Reel packing; with „PickUp Cap“
with "locating pegs"
C = Tube packing; without „PickUp Cap“
D = Tube packing; with „PickUp Cap“
E = Reel packing; with „PickUp Cap“