
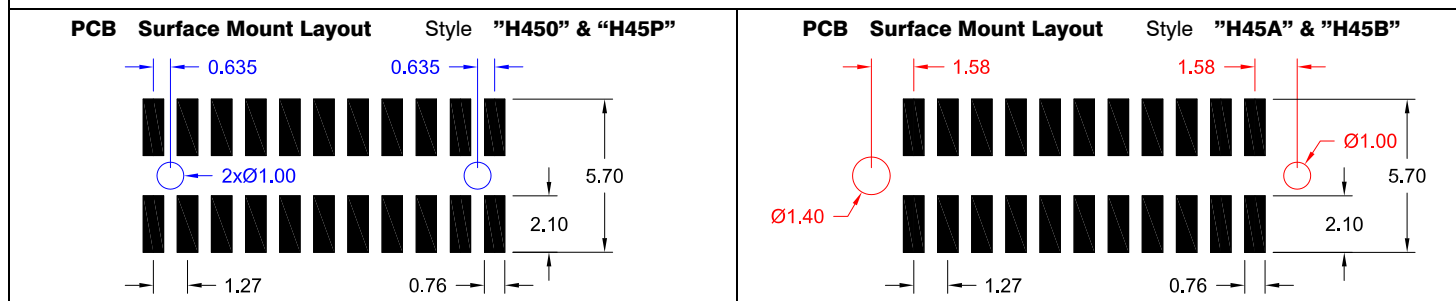


1.27mm pitch Female Header

- SMT - dual row 4.50mm profile

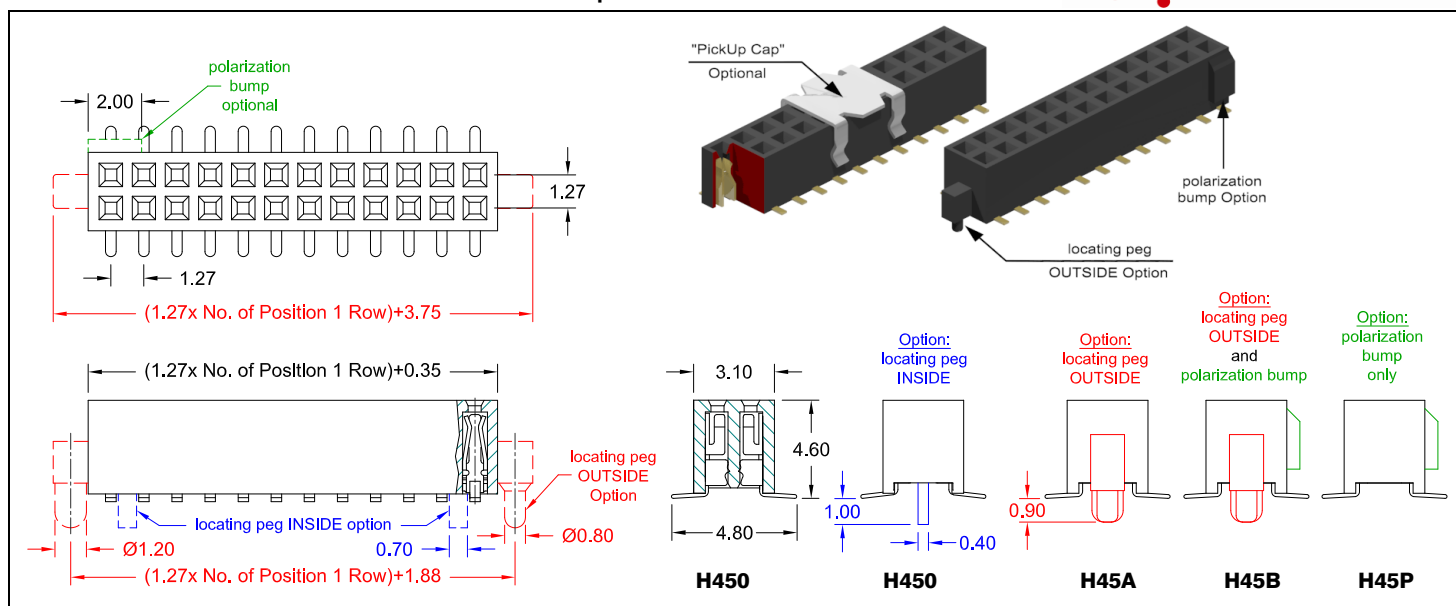

Specifications			
Current rating	1 A	Operating temperature	- 40°C to +105°C
Insulation resistance	1000 MΩ min.	Processing temperature	+250°C +0/-5°C for 5sec.
Contact resistance	20 mΩ max.	Contact material	PhBz (Gold flash plated)
Withstanding voltage	300 V AC	Insulator material	LCP UL 94 V-0

Application and Features

Standard: Tube packing without "locating pegs", without "PickUp Cap" and without polarization bump

Also available with "PickUp Cap" for automatic suck assembly to the PCB

Medium profile, 4.50mm height Type with Hi-rel dual beam contacts

Mating with 1.27mm pitch Box Header SLS-xxx-H610- & -HP2x-55/11 (page 26), or 1.27mm pitch 0.40mm square or round Pin Headers

How to order

BS2 - xxx - H xxx - 55/11 X

Nbr of contacts	Style	Options
008 to 100		
004 to 100 only		
BS2-xxx-H450-55/11	450 = without & with inside locating pegs	See below
BS2-xxx-H450-55/11A	45A = with outside locating pegs	
BS2-xxx-H450-55/11B	45B = with outside locating pegs & polarization bump	
	45P = with polarization bump; without locating pegs	

Order Code Options:

without "locating pegs"

BS2-xxx-H450-55/11	=	Tube packing; w/o „PickUp Cap“
BS2-xxx-H45P-55/11	=	Tube packing; w/o „PickUp Cap“
BS2-xxx-H450-55/11A	=	Tube packing; with „PickUp Cap“
BS2-xxx-H45P-55/11A	=	Tube packing; with „PickUp Cap“
BS2-xxx-H450-55/11B	=	Reel packing; with „PickUp Cap“
BS2-xxx-H45P-55/11B	=	Reel packing; with „PickUp Cap“

with "locating pegs"

BS2-xxx-H450-55/11C	=	Tube packing; w/o „PickUp Cap“
BS2-xxx-H450-55/11D	=	Tube packing; with „PickUp Cap“
BS2-xxx-H45A-55/11D	=	Tube packing; with „PickUp Cap“
BS2-xxx-H45B-55/11D	=	Tube packing; with „PickUp Cap“
BS2-xxx-H450-55/11E	=	Reel packing; with „PickUp Cap“
BS2-xxx-H45A-55/11E	=	Reel packing; with „PickUp Cap“
BS2-xxx-H45B-55/11E	=	Reel packing; with „PickUp Cap“