
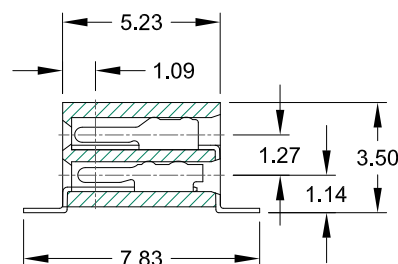
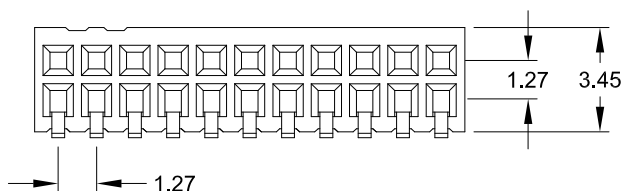
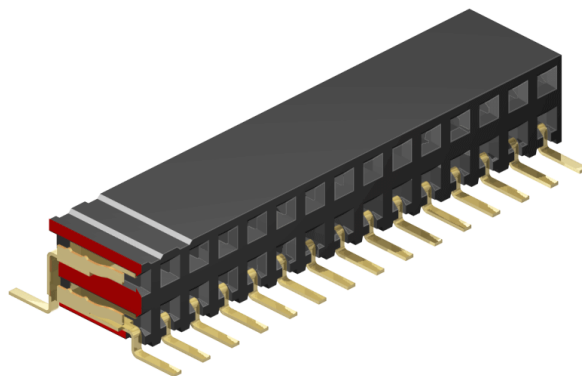


1.27mm pitch Female Header


- SMT- side entry

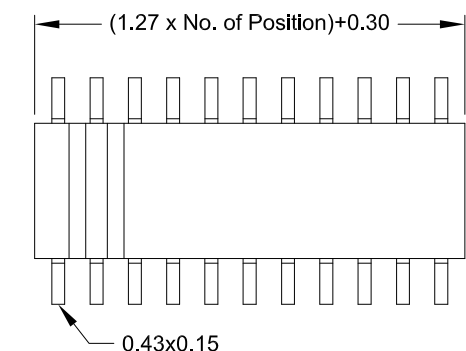

Application and Features

- **Standard: Tube packing**
- Hi-rel dual beam contact assures reliable PC-Board connections
- Accepts 0.40mm square pins;
Pin Header 1.27mm x1.27 mm
- 3.50mm height above board
- Automatic assembly to PCB possible

PCB Surface Mount Layout

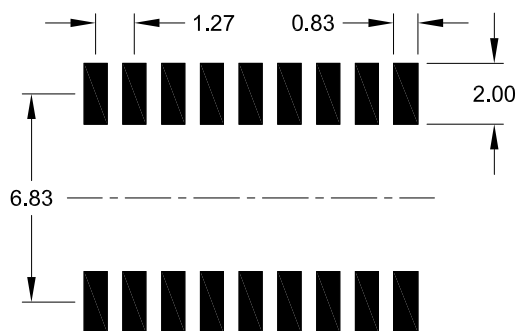

Specifications

Current rating	1 A
Insulation resistance	1000 MΩ min.
Contact resistance	20 mΩ max.
Withstanding voltage	500 V AC

Operating temperature	- 40°C to +105°C
Processing temperature	+250°C +0/-5°C for 5sec.
Contact material	(RoHS compliant) Phosphor Bronze
Insulator material	(RoHS compliant) LCP UL 94 V-0

How to order

BS2 - xxx - R345 - 55/11 X

Nbr of contacts	
006	to 080

Plating
55 = Gold
other platings on request

Packing Option
M = Tray
T = Tube
R = Reel