





Current rating	2 A
Insulation resistance	1000 MΩ min.
Withstanding voltage	500 V AC
Operating temperature	- 40°C to +105°C
Contact material (RoHS compliant)	Copper alloy
Insulator material (RoHS compliant)	PBT or PA6T UL 94 V-0
	Standard: PBT

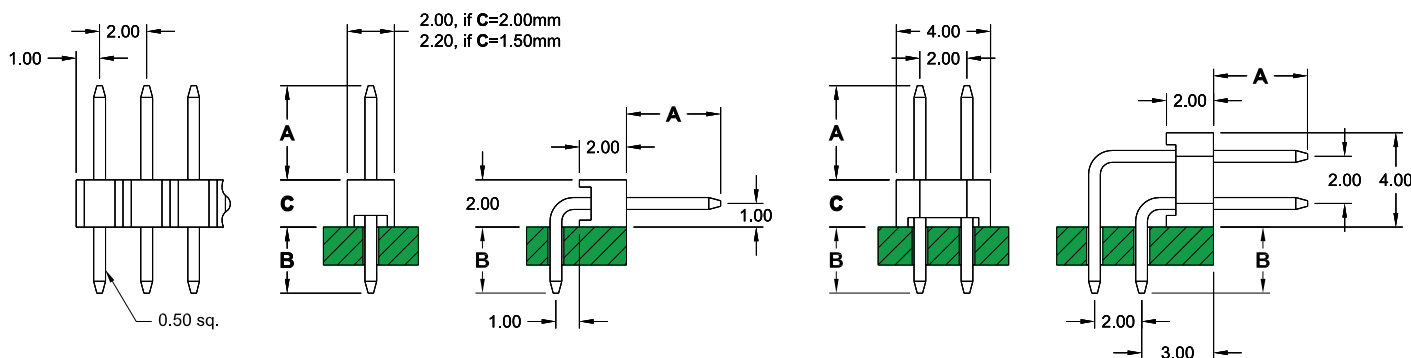

- Side and end stackable.
- Variable terminal lengths as well as two insulator thicknesses available for the straight type.
- Notches for easy breaking.
- Straight type with standoff's for post solder cleaning.

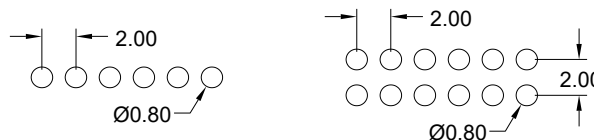