


2.00mm pitch Pin Header

- SMT - single & dual row

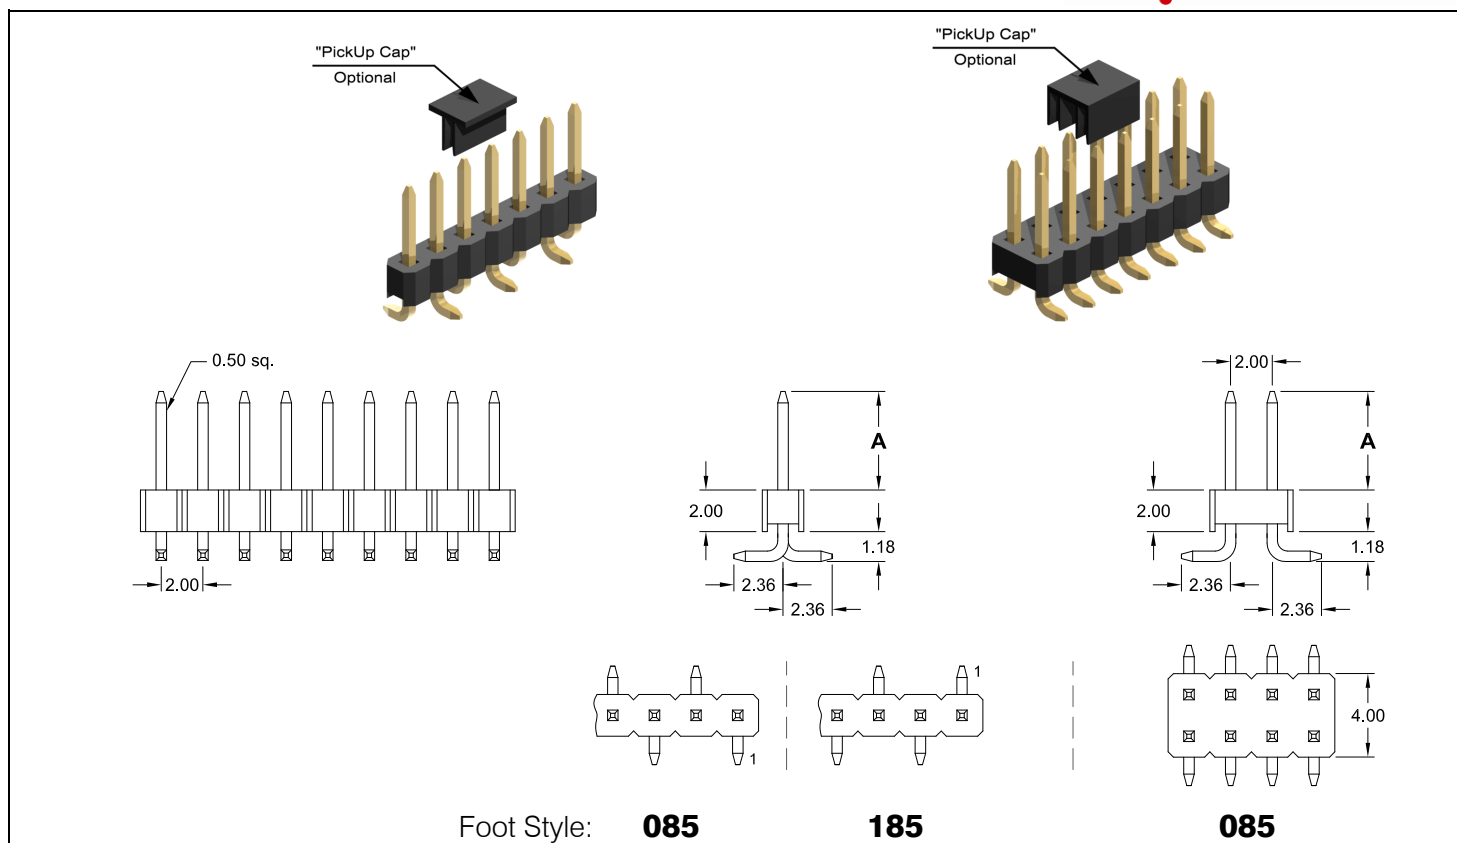

Foot Style: **085**


185

085

Application and Features

- **Standard: Tube packing and without "PickUp Cap"**
- Low Profile Insulator
- Assures reliable PC Board connections
- Mate with Female Header 2.00mm pitch

PCB Surface Mount Layout

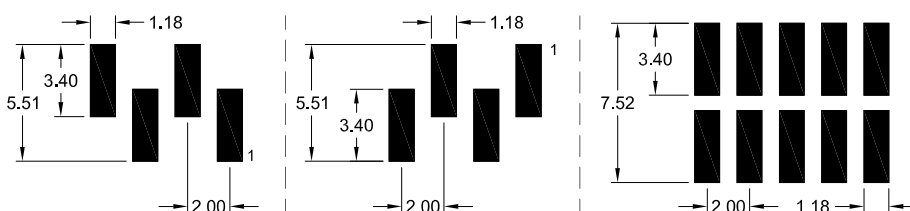

Foot Style: **085** (single row)

185 (single row)

085 (dual row)

Specifications

Current rating	2 A	Operating temperature	- 40°C to +105°C
Insulation resistance	1000 MΩ min.	Processing temperature	+250°C +0/-5°C for 5sec.
Withstanding voltage	500 V AC	Contact material	(RoHS compliant) Brass
		Insulator material	(RoHS compliant) PA6T UL 94 V-0

How to order

SS x - xxx - H xxx / x - **55**/2 X

Rows	Nbr of pins	Foot Style	Pin code	DIM "A"	Plating	Packing and „PickUp Cap“ Option
1 single row	002 to 040	085 185 Pls. choose 085 Style if odd pin count.	0 1 2 3 4 5 6 7	4.73 mm 6.00 mm 13.57 mm 6.50 mm 8.07 mm 7.62 mm 9.10 mm 10.00 mm	55 = Gold other platings on request	A = Tube packing; with „PickUp Cap“ B = Reel packing; with „PickUp Cap“
2 dual row	004 to 080	085	other dimensions on request			