


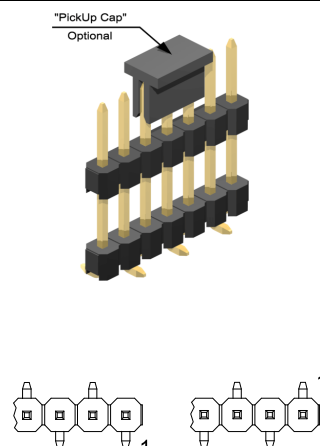

161

- Designed for “Board to Board” spacing
- Variable terminal length available
- Mate with Female Header 2.54mm pitch

161 (single row)

Operating temperature	- 40°C to +105°C
Processing temperature	+250°C +0/-5°C for 5sec.
Contact material (RoHS compliant)	Copper alloy
Insulator material (RoHS compliant)	PA6T UL 94 V-0

SP x - xxx - H xxx / xx - 55 X

Rows	Nbr of pins	Foot Style	Pin code	DIM "A"	DIM "B"	Plating	Options
1 single row	002 to 040	160 161 Pls. choose 160 Style if odd pin count.	16 03 12 04 07 09 01 15 14 06 17 05 13 02 08 10 11	3,50 mm 5,50 mm 5,50 mm 7,50 mm 5,90 mm 3,70 mm 6,00 mm 6,90 mm 8,80 mm 5,50 mm 7,00 mm 6,00 mm 8,80 mm 4,50 mm 6,00 mm 2,70 mm 4,00 mm	5,30 mm 6,40 mm 7,50 mm 9,40 mm 10,60 mm 10,70 mm 11,40 mm 12,50 mm 13,60 mm 14,00 mm 14,50 mm 15,50 mm 16,10 mm 17,00 mm 28,00 mm 28,30 mm 34,30 mm	55 = Gold other platings on request	without "locating pegs" A = Tube packing; with „PickUp Cap“ B = Reel packing; with „PickUp Cap“ with "locating pegs" dual row only! C = Tube packing; w/o „PickUp Cap“ D = Tube packing; with „PickUp Cap“ E = Reel packing; with „PickUp Cap“
2 dual row	004 to 080	160	other dimensions on request				