
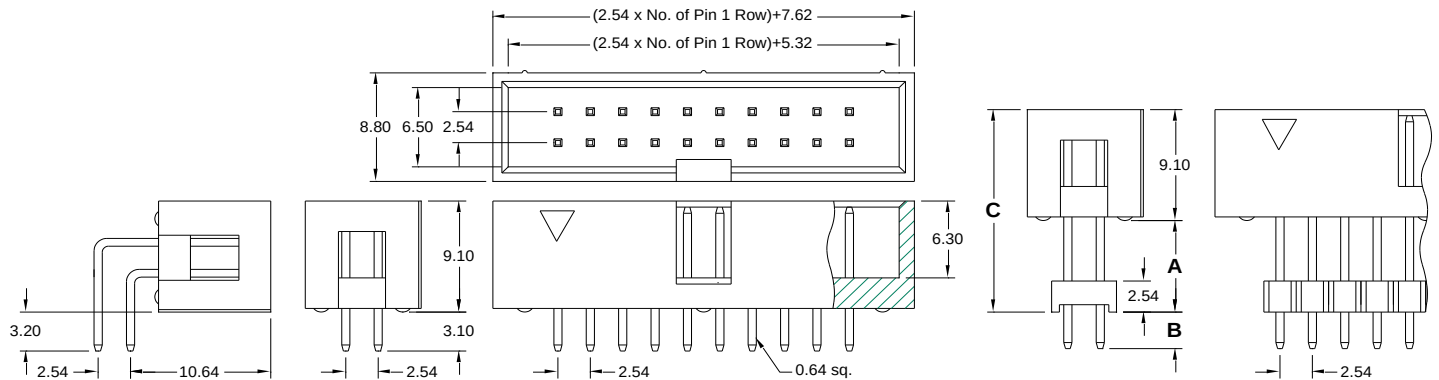




2.54mm pitch Box Header

- THT - right angle - straight - raised



Style

R920


S920

Dxxx

Application and Features

- Mating devices for Female Headers, solder tail and IDC Type
- Reliable flat cable to PCB connection
- No ejection latches for space saving

PCB Hole Layout

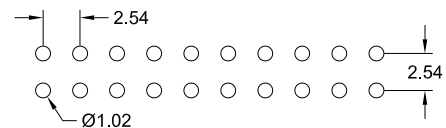

Specifications

Current rating 3 A
Insulation resistance 1000 MΩ min.
Withstanding voltage 500 V AC

Operating temperature - 40°C to +105°C
Contact material (RoHS compliant) Brass
Insulator material (RoHS compliant) PBT UL 94 V-0

How to order

SLS - xxx - X xxx - 55

Nbr of pins	Style	Pin code for "Dxxx" = raised Style	DIM "A" (mm)	DIM "B" (mm)	DIM "C" (mm)	Plating
"S" & "R" Style: 006; 008; 010; 012; 014; 016 020; 024; 026; 030; 034; 040 044; 050; 060; 064	S920 = straight R920 = right angle	141	5.00	3.00	14.10	55 = Gold other platings on request
		166	7.50	3.00	16.60	
		232	14.10	3.00	23.20	
		235	14.40	3.00	23.50	
		other dimensions on request				
"D" Style: 006; 008; 010; 012; 014; 016 020; 024; 026; 030; 034; 040 050; 060; 064	Dxxx = raised Style					