

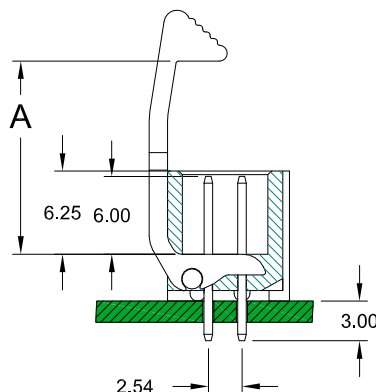
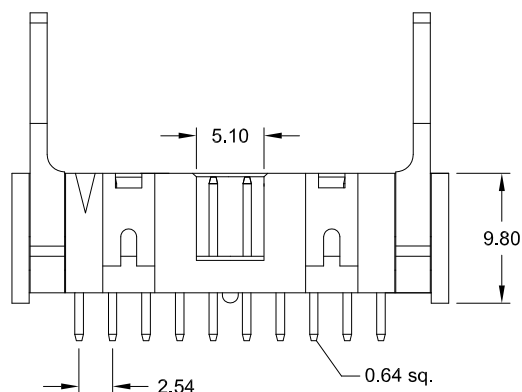
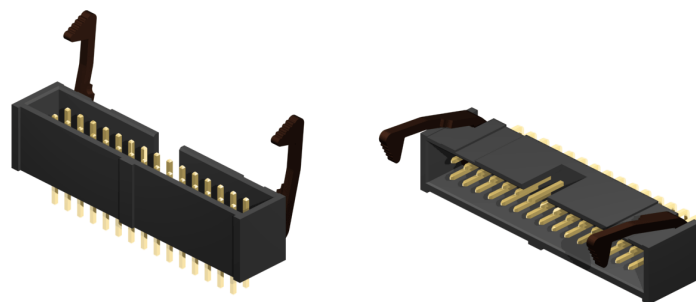


2.54mm pitch Box Header - THT - with metal ejection latches

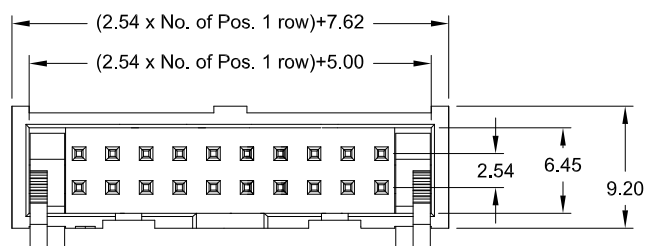

Style **S103**

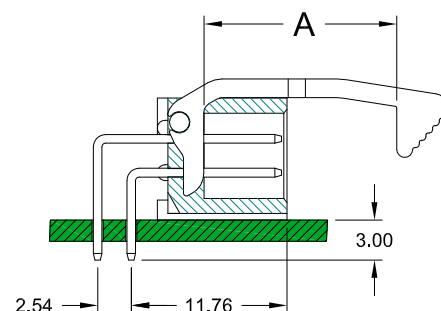


R103

Application and Features

- Mating devices for Female Headers IDC Type
- Reliable flat cable to PCB connection
- Ejection latches for easy handling

PCB Hole Layout

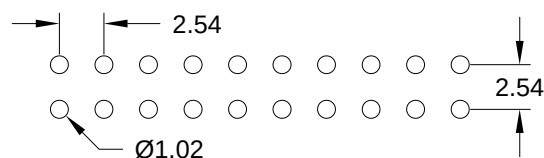

Specifications

Current rating	3 A
Insulation resistance	1000 MΩ min.
Withstanding voltage	1000 V AC

Operating temperature	- 40°C to +105°C
Contact material	(RoHS compliant) Copper alloy
Insulator material	(RoHS compliant) PBT UL 94 V-0
	Standard: black

How to order

SLS - xxx - X 103 - 55 / X

Nbr of pins
006; 008; 010
014; 016; 020
026; 030; 034
040; 050; 060
064

Style
S = straight
R = right angle

Plating
55 = Gold
other platings on request

Latch Style
S = short latch DIM "A" = 10.65 mm
L = long latch DIM "A" = 14.55 mm