

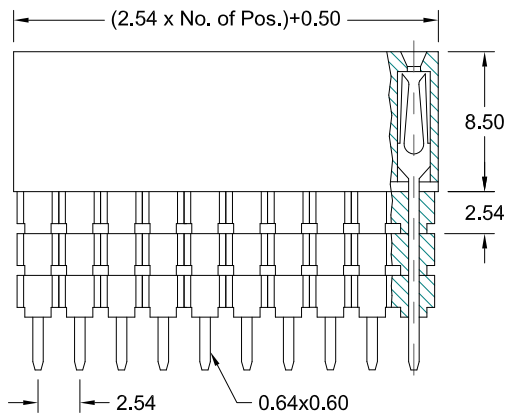





single row

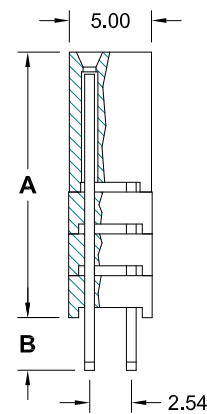




dual row

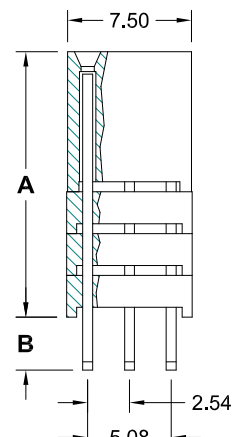

triple row

Application and Features

- Various heights for Board-to-Board connections
- Ideal solution for PC/104-Plus Systems
- Accepts 0.64mm square pins
- Hi-rel fork contact design

PCB Hole Layout**Specifications**

Current rating	3 A
Insulation resistance	1000 MΩ min.
Contact resistance	20 mΩ max.
Withstanding voltage	500 V AC

Operating temperature	- 40°C to +105°C
Contact material	(RoHS compliant) Phosphor Bronze
Insulator material	(RoHS compliant) PBT UL 94 V-0

How to order

BE x - xxx - S xxx - 55

Rows

- 1** = single row
- 2** = dual row
- 3** = triple row

Nbr of contacts

- single row = **002** to **040**
- dual row = **004** to **080**
- triple row = **006** to **120**

Style

Style	DIM "A"	DIM "B"
111	11.05 mm	2.30 mm
112	11.05 mm	7.35 mm
113	11.05 mm	12.20 mm
131	13.59 mm	4.85 mm
132	13.59 mm	9.65 mm
161	16.13 mm	2.30 mm
162	16.13 mm	7.10 mm
181	18.67 mm	4.60 mm

other dimensions on request

Plating

- 55** = Gold
- other platings on request