


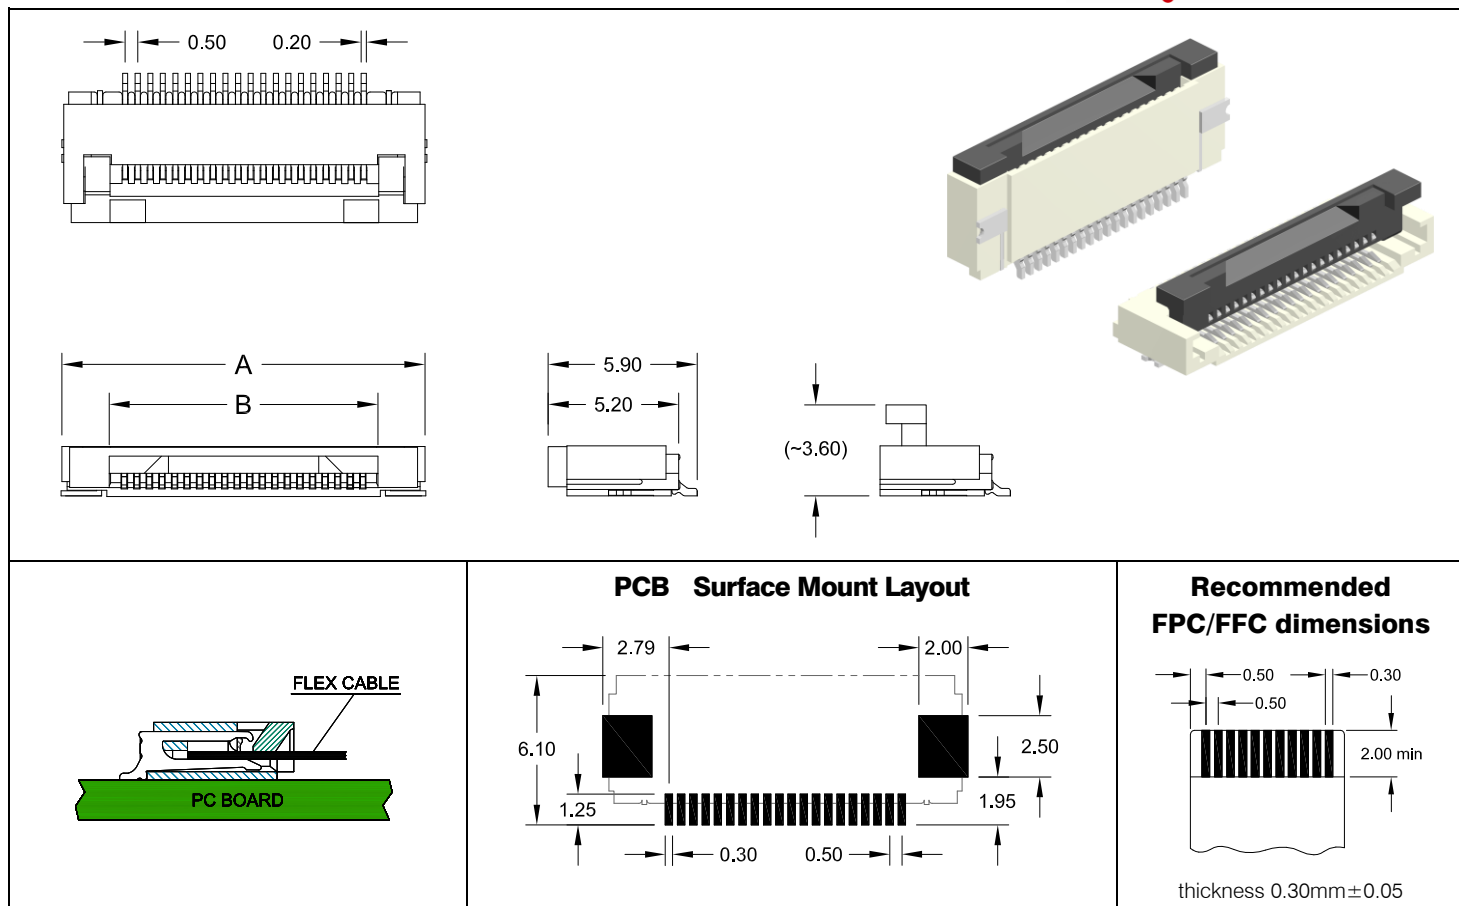

Specifications

Current rating
Insulation resistance
Contact resistance
Withstanding voltage

0.5 A max.
500 MΩ min.
20 mΩ max.
200 V AC

Operating temperature
Processing temperature
Contact material (RoHS compliant)
Contact plating
Insulator material (RoHS compliant)
Actuator material (RoHS compliant)

- 20°C to +85°C
+250°C +0/-5°C for 3sec.
Phosphor Bronze
Tin (leadfree)
LCP (Natural) UL 94 V-0
LCP (Black) UL 94 V-0

Dimensions (mm)

Contacts	DIM "A"	DIM "B"	Contacts	DIM "A"	DIM "B"	Contacts	DIM "A"	DIM "B"	Contacts	DIM "A"	DIM "B"
006	7.40	3.60	020	14.40	10.60	034	21.40	17.60	048	28.40	24.60
007	7.90	4.10	021	14.90	11.10	035	21.90	18.10	049	28.90	25.10
008	8.40	4.60	022	15.40	11.60	036	22.40	18.60	050	29.40	25.60
009	8.90	5.10	023	15.90	12.10	037	22.90	19.10	051	29.90	26.10
010	9.40	5.60	024	16.40	12.60	038	23.40	19.60	052	30.40	26.60
011	9.90	6.10	025	16.90	13.10	039	23.90	20.10	053	30.90	27.10
012	10.40	6.60	026	17.40	13.60	040	24.40	20.60	054	31.40	27.60
013	10.90	7.10	027	17.90	14.10	041	24.90	21.10	055	31.90	28.10
014	11.40	7.60	028	18.40	14.60	042	25.40	21.60	056	32.40	28.60
015	11.90	8.10	029	18.90	15.10	043	25.90	22.10	057	32.90	29.10
016	12.40	8.60	030	19.40	15.60	044	26.40	22.60	058	33.40	29.60
017	12.90	9.10	031	19.90	16.10	045	26.90	23.10	059	33.90	30.10
018	13.40	9.60	032	20.40	16.60	046	27.40	23.60	060	34.40	30.60
019	13.90	10.10	033	20.90	17.10	047	27.90	24.10			

How to order

FCZ - xxx - H058 - 99 /R

Nbr of contacts
003 to 060

Plating
99 = Tin (leadfree)

Packing
/R Reel packing (Reel packing qty. on request)